

My partner for tools!



Key Products made bei Schuebo,
presented by Jens Schnabel
Brainmade-Products.



Universal key - SuBMaster - 9 in 1 / SuBMaster Construction



A double turning mechanism allows **eight** different keys to be positioned. The additional 5 mm square is especially suitable for aerating radiator valves. Supplied with a chain and a snap hook.

Designed for locking systems in:

- industry
- trade
- public services tec.



Bit insert with a magnetic pocket on the lower side of SuBMaster. With a 1/4" bit holder.

■ European patent




Item	Best.-Nr.	Euro
Universal key - SuBMaster 9 in 1	900-000	

Adapter for all locks with PZ perforation. Suitable for all common technical locks. A quadruple turning mechanism allows **eight** different keys to be positioned on control cubicles. An additional 5 mm square is provided on the body. The head of the stepped square is connected to the SuBMaster by a magnet and can be easily detached. Supplied with a stable chain and a snap hook.

Technical data:

- Dimensions: 157 x 95 mm
- Weight: approx. 235 g

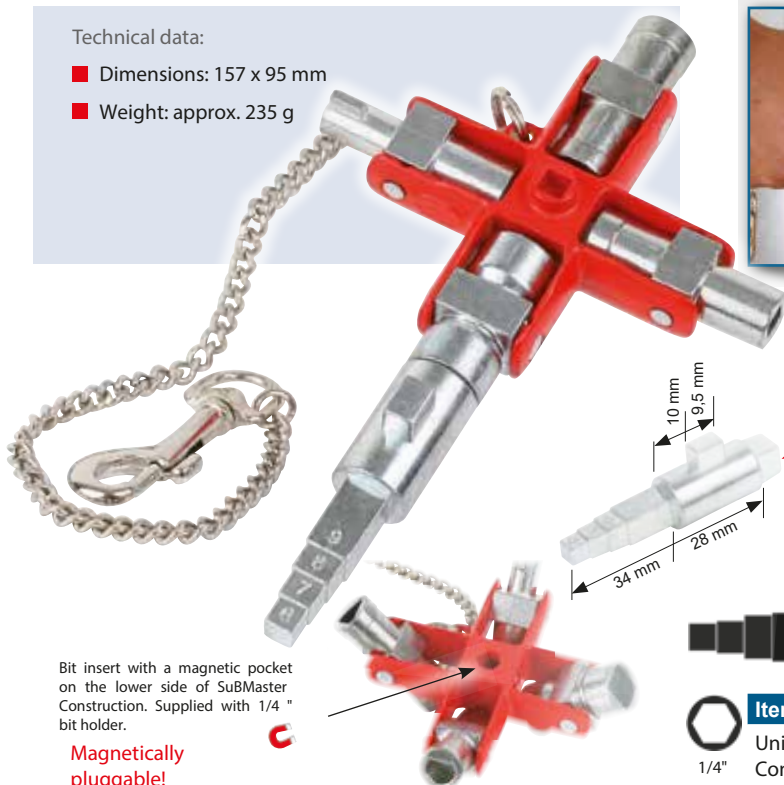

Bit insert with a magnetic pocket on the lower side of SuBMaster Construction. Supplied with 1/4" bit holder.

Magnetically pluggable!



Item	Part no.	Euros
Universal key SuBMaster Construction	950-000	


Universal key - SuBMaster LED / Voltage detector



For all common technical locks. A quadruple turning mechanism allows **eight** different keys to be positioned on control cubicles. An additional 5 mm square is provided on the body. Supplied with a stable chain and a snap hook. Includes batteries.

Technical data:

- Dimensions: 95 x 95 mm
- Weight: approx. 175 g

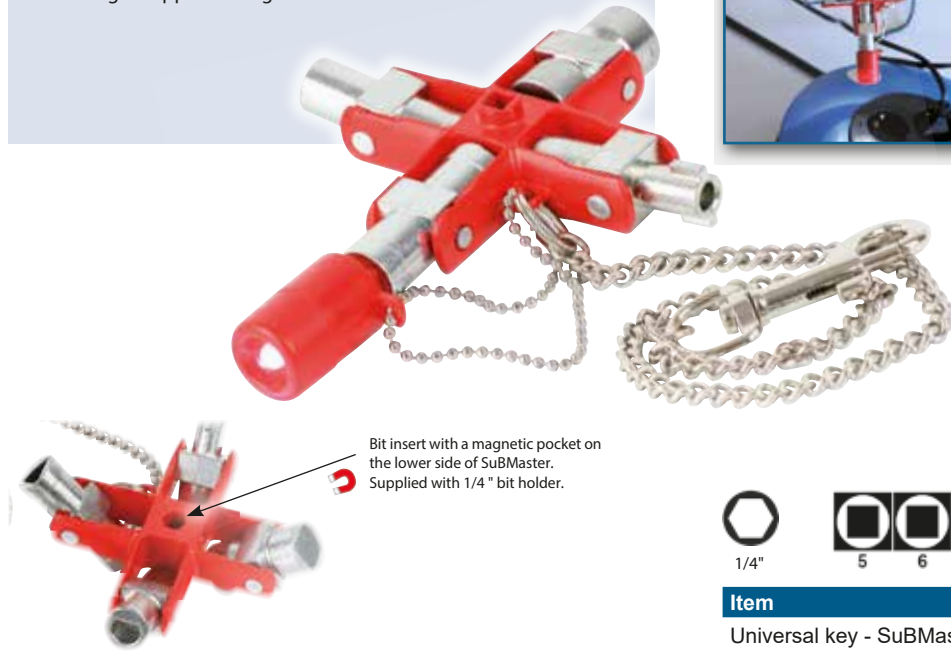

Bit insert with a magnetic pocket on the lower side of SuBMaster. Supplied with 1/4" bit holder.



Item	Part no.	Euros
Universal key - SuBMaster with LED	920-000	

For all common technical locks. A quadruple turning mechanism allows **eight** different keys to be positioned. An additional 5 mm square is provided on the body. Non-contact visual detection of AC voltages. Voltage range of between 50 V and 600 V. Visual indication of readings in a self-test with the device switched on by a bright and clear LED display. Supplied with a stable chain and a snap hook.

Technical data:

- Dimensions: 95 x 95 mm
- Weight: approx. 175 g
- Frequency range: 50 Hz - 60 Hz
- Safety in accordance with EN 61010



Bit insert with a magnetic pocket on the lower side of SuBMaster. Supplied with 1/4" bit holder.



Item	Part no.	Euros
Universal key - SuBMaster with voltage detector	930-000	

Non-contact voltage detector - SuBFinder



An integral voltage field sensor enables the reliable detection of AC voltages on cable connections, sockets, fuses, couplings, lamps, strings of lights etc.. Current flow is not required. Cable breaks and cable interruption can also be identified. The finder is switched off by depressing a push-button. Readiness for operation is visually indicated. The universal 1/4" bit holder is suitable for all bits. A neodymium permanent magnet keeps the bit safely in place.

connecting boxes, r is switched on and commercially available

SuBFinder Electrical

For almost all common locks on control cubicles. A double turning mechanism allows **four** different keys to be positioned on control cubicles.

SuBFinder Construction

For almost all common locks on control cubicles. A double turning mechanism allows **three** different keys to be positioned on control cubicles.



Technical data

- Measuring range: 50 V - 600 V
- Resolution: voltage applied / voltage not applied
- Tolerances: in accordance with DIN EN 61243-3
- Frequency range: 50 Hz - 60 Hz
- Voltage supply: 2 x 1.5 V button cell (common type) included in the scope of supply

- Temperature range: 0°C - 40°C
- Length: 155 mm
- Weight: 140 g
- GS sign
- CE sign
- Protected by patent and registered design



+ 1/4" Bit PH 2



5 7-8 9 3-5 mm



+ 1/4" Bit PH 2



8 9 6-9 mm

Item	Part no.	Euros
SuBFinder "Electrical"	400-020	
Spare battery	04276 101 401	

Item	Part no.	Euros
SuBFinder "Construction"	400-150	
Spare battery	04276 101 401	

Universal key for control cubicles - SuBKey



Universal key for control cubicles and screwdriver. For almost all common locks on control cubicles. A double turning mechanism allows four different keys to be positioned on control cubicles. Universally usable for all common locks on control cubicles. A 5 mm square especially suitable for aerating radiator valves. The universal 1/4" bit holder is suitable for all commercially available bits. A neodymium permanent magnet keeps the bit safely in place. A spare bit can be accommodated in the head of the key. Using the handy clip, SuBKey can be conveniently fastened to your shirt.

SuBKey Electrical

For all common locks on control cubicles. With double turning mechanism.

SuBKey Construction

Universal key with stepped male square and double turning mechanism.



Technical data

- 1/4" bit holder, bit PH 2
- Length: 145 mm
- Weight: approx. 120 g
- German patent: 10 2005 045 282.5
- German registered design: 202 16 931.6
- European patent: EP06017606



+ 1/4" Bit PH 2

5 6 7-8 9 3-5 mm

+ 1/4" Bit PH 2

5 8 9 6-9 mm

Item	Part no.	Euros
SuBKey "Electrical"	300-020	

Item	Part no.	Euros
SuBKey "Construction"	300-150	

Universal key for control cubicles - SuBLight



For almost all common locks on control cubicles. A double turning mechanism allows **three** or **four** different keys to be positioned on control cubicles. The universal 1/4" bit holder is suitable for all commercially available bits. A neodymium permanent magnet keeps the bit safely in place.

Suitable for:

- Control cubicles and switching systems
- Technical locks on ventilation and air-conditioning systems, inspection flaps
- Locks on street lamps, waste bins, waste containers etc.

SuBLight Electrical


A double turning mechanism allows **four** different keys to be positioned. Design with high performance LED.

SuBLight Construction

A double turning mechanism allows **three** different keys to be positioned. Design with high performance LED.

Technical data

- 1/4" bit holder, bit PH 2
- Length: 145 mm
- Weight: approx. 120 g
- Protected by patent and registered design

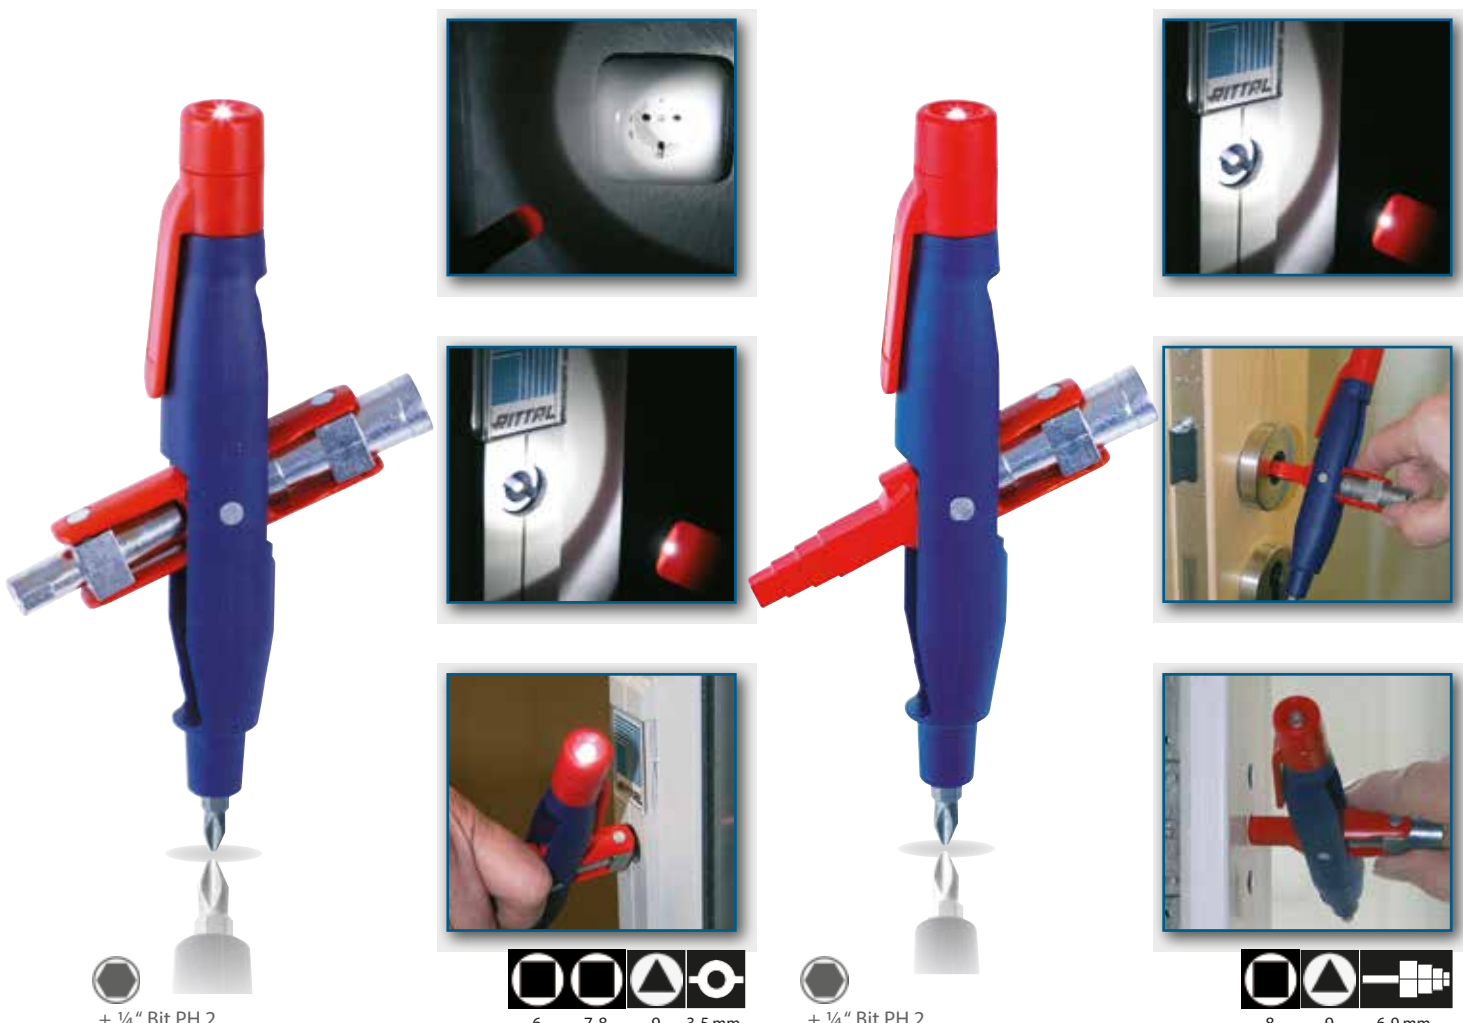

+ 1/4" Bit PH 2

6 7-8 9 3-5 mm

+ 1/4" Bit PH 2

8 9 6-9 mm

Item	Part no.	Euros
SuBLight "Electrical"	500-000	

Item	Part no.	Euros
SuBLight "Construction"	500-150	


Universal key for control cubicles with chain, bit and adapter

REVERSIBLE BIT ¼", slot: 1.0 x 7 mm, PH 2



Technical data

- For almost all common locks
- With radiator aerating key in the central hub
- Made from zinc die casting



Item	Part no.	Euros
Universal key for control cubicles	472 M03	
Universal key for control cubicles black with 1 watt LED	472 M03 sw-LED	


Item	Part no.	Euros
Universal key for control cubicles red with 1 watt LED	472 M03rt-LED	
Universal key for control cubicles yellow with 1 watt LED	472 M03 ge-LED	

Technical data


- Made from zinc die casting, with chain, adapter and bit
- For sanitary, heating, ventilation and air-conditioning systems etc.
- Dimensions: 42 x 42 mm

Technical data

- Made from zinc die casting, with chain, adapter and bit
- For sanitary, heating, ventilation and air-conditioning systems as well as building construction applications
- Dimensions: 90 x 62 mm



Item	Part no.	Euros
Universal key for control cubicles "Mini"	520 M 03	



Item	Part no.	Euros
Universal key "Professional Key"	820 M 03	

Universal key for control cubicles with voltage tester

REVERSIBLE BIT ¼", slot: 1.0 x 7 mm, PH 2



An integral voltage field sensor enables the reliable detection of AC voltages on cable connections, sockets, fuses, couplings, lamps, strings of lights etc. Current flow is not required. Cable breaks and cable interruption can also be identified. The finder is switched on and off by depressing a push-button. Readiness for operation is visually indicated.

connecting boxes, finder is switched on and

Technical data


- Measuring range: 50 V - 600 V
- Resolution: voltage applied / voltage not applied
- Frequency range: 50 Hz - 60 Hz
- Voltage supply: 2 x 1,5 V
- Button cell (common type) included in the scope of supply
- Temperature range: 0 °C - 40 °C
- Dimensions: approx. 158 x 28 mm
- Weight: approx. 135 g
- GS sign / CE sign

For locks in:

- Gas and water supply
- Air conditioning and ventilation systems
- Electrical engineering, industry etc.



WITH VOLTAGE TESTER



Item	Part no.	Euros
Universal key for control cubicles with voltage tester	472M03ST	

Technical data

- Made from zinc die casting, with chain, adapter and bit
- For sanitary, heating, ventilation and air-conditioning systems etc.
- Dimensions: 42 x 42 mm



WITH VOLTAGE TESTER



Item	Part no.	Euros
Universal key for control cubicles with voltage tester	520M03ST	

Technical data

- Made from zinc die casting, with chain, adapter and bit
- For sanitary, heating, ventilation and air-conditioning systems etc.
- Dimensions: 90 x 62 mm



WITH VOLTAGE TESTER



Item	Part no.	Euros
Universal key for control cubicles with voltage tester	820M03ST	